MATERIAL SPECIFICATION DRAWING

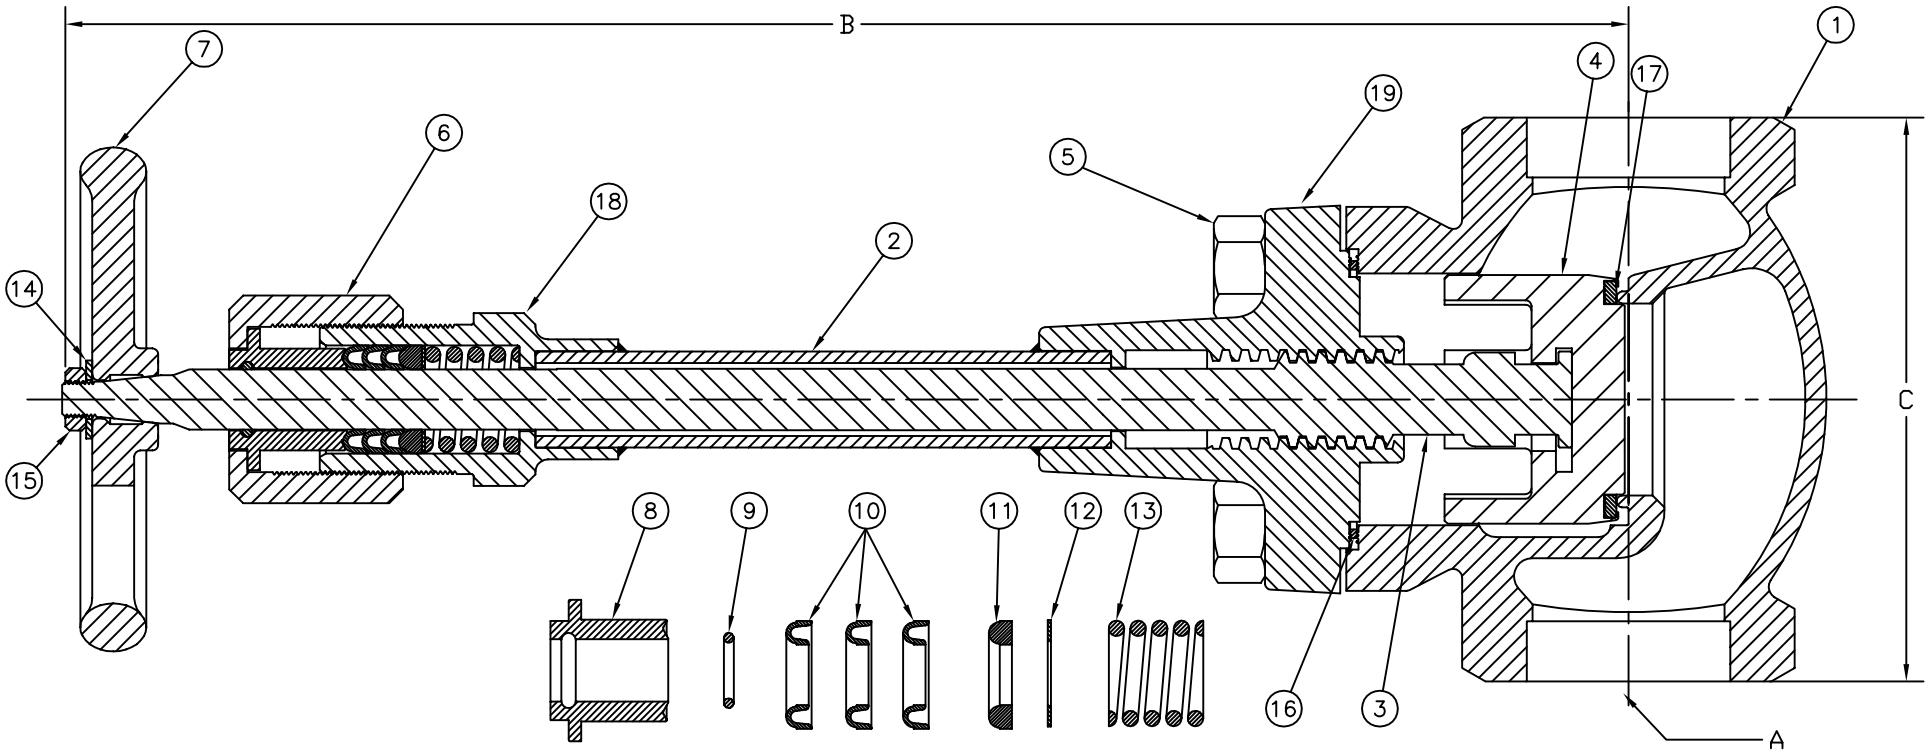

PART NO.	A (SIZE)	B	C
BK9410S/T	1 1/4 NPT	16"	5.2"
BK9412S/T	1 1/2 NPT	16"	5.2"
BK9416S/T	2 NPT	16"	6"

ITEM	QTY.	DESCRIPTION	NUMBER
19	1	BRASS LOWER BONNET	UNS C36000
18	1	BRASS UPPER BONNET	UNS C36000
17	1	PCTFE SEAT DISC	ASTM D1430
16	1	PTFE GASKET	ASTM D1457
15	1	PLATED STEEL LOCKNUT	ASTM A563
14	1	PLATED STEEL WASHER	ASTM F844
13	1	302 SSTL SPRING	UNS S30200
12	1	304 SSTL WASHER	UNS S30400
11	1	VIRGIN PTFE JAM RING	ASTM D1457
10	3	VIRGIN PTFE PRESSURE SEAL RINGS	ASTRM D1457
9	1	FLUOROCARBON O-RING	ASTM HK
8	1	BRASS PACKING GLAND	UNS C36000
7	1	DUCTILE IRON HANDWHEEL	ASTM A663
6	1	BRASS SEAL HOUSING	UNS C36000
5	4	304 SSTL SCREW	UNS S30400
4	1	BRASS SEAT RETAINER	UNS C36000
3	1	303 SSTL STEM	UNS S30300
2	1	304 SSTL TUBE	UNS S30400
1	1	BRONZE BODY	UNS C92200

DRAWN | ENGINEER

CHECKED | APPROVED

ORIGINAL DATE 1/19/01 | PLOT GENERATED:

REVISIONS

REGO® CRYO-FLOW PRODUCTS
BURLINGTON, N.C. 27215

UNLESS OTHERWISE SPECIFIED:
▼ ± .015
2 PL. DEC. ± .02
3 PL. DEC. ± .005
4 PL. DEC. ± .0005
ANGLES ± 1°
CONCENTRICITY .010 FIM
FINISH 125 MAX
REMOVE BURRS, BREAK SHARP EDGES R.015 MAX
INTERPRET DIMENSIONS & TOLERANCES IAW ASME Y14.5M-1994
SCALE (1:1)

THIS DRAWING IS ECII PROPRIETARY INFORMATION
ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED

TITLE:
BOLTED BONNET
GLOBE VALVE

DRAWING NO. BK SERIES

DWG SIZE

Ⓐ-CHANGES ①-GAGES